

## Wall mounted receptacle

Part no. 1137A




- screw terminals
- X-CONTACT®
- suitable for through wiring
- internal fixing
- enclosure base can be turned 180°
- with 6 fixing points to accommodate special terminals
- products with pilot contacts on request

## Technical specifications

Ampere	63 A
Poles	3 p
Voltage	230 V
Clock position	6 h
Hertz	60-50 Hz
Connection technology	Screw terminals
Contact	X-CONTACT®
Protection type	IP 44
Weight	859 g
Declaration of Conformity	DE, VDE, CN, CQC

## Drawing










Drawing 1 MB 213	Amp. Poles	63		
		3	4	5
Dim. in mm	a	170	170	170
	b	118	118	118
	c	164	164	164
	d	134.5	134.5	134.5
	e	103	103	103
	f	6.1	6.1	6.1
	g	6	6	6
	h	216	216	216
	M	40	40	40
	M*	2xM40 (blind) to be cut out		
	Max. cable diam. (mm)	32	32	32
	Terminal for cond. cross section (mm²) min.-max.	6	6	6
		-25	-25	-25

# MENNEKES CEE plugs and connectors PowerTOP plus for use under harsh conditions


with highly heat-resistant contact carrier and nickel-plated contacts

to DIN VDE 0623, EN 60309-2, colour: grey and/or colour code. Enclosure and insert made of **AMAPLAST**. Other voltages and frequencies available on request.

  			Ampere	Poles	110V	230V	400V	500V						
					50 a. 60Hz	50 a. 60Hz	50 a. 60Hz	50 a. 60Hz						
			3p 4h	4p 4h	5p 4h	3p 6h	4p 9h	5p 9h	3p 9h	4p 6h	5p 6h	3p 7h	4p 7h	5p 7h
 <p><b>Plug PowerTOP plus</b></p> <p>⚠ IP 44 Product group 2219, type 3258 shown</p>	63	3	3210	3212	3252	3255								
	63	4		3249	3258									
	63	5												
 <p><b>Plug PowerTOP plus</b></p> <p>⚠ IP 67 Product group 2220, type 3325 shown</p>	63	3	3301	3303	3308	3323								
	63	4	3304	3305	3325									
	63	5												
	125	3		3358	3374*	3377*								
	125	4			3381*									
 <p><b>Connector PowerTOP plus with SoftCONTACT</b></p> <p>⚠ IP 44 Product group 3219, type 3285 shown</p>	63	3	3270	3272	3275	3277								
	63	4		3273	3285									
	63	5												
 <p><b>Connector PowerTOP plus</b> 63A: with SoftCONTACT 125A: with TorsionSpringCONTACT</p> <p>⚠ IP 67 Product group 3220, type 3425 shown</p>	63	3	3401	3403	3408	3423								
	63	4	3404	3405	3425									
	63	5												
	125	3		3457*	3469*	3472*								
	125	4			3480*									
125	5													


\*Until the PowerTOP plus are available for 125A, the reliable PowerTOP plugs and connectors are delivered with external strain relief.

**Highly heat-resistant contact carrier, frame terminals, nickel-plated contacts,** cable gland with integrated strain relief, seal and protection against kinking, enclosure with thread lock, two safety slides




Drawing	Amp. Poles	63		
		3	4	5
2 MB 228				
Dim. in mm	a	250	250	250
	Øb	90	90	90
	Øy [max]	36	36	36
Terminal for cond. cross section (mm <sup>2</sup> ) min.-max.		6 6	6 6	6 6
		-16	-16	-16

**Highly heat-resistant contact carrier, frame terminals, nickel-plated contacts,** cable gland with integrated strain relief, seal and protection against kinking, enclosure with thread lock, two safety slides

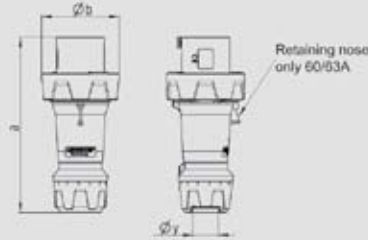


Drawing	Amp. Poles	63			125		
		3	4	5	3	4	5
2 MB 227							
Dim. in mm	a	250	250	250	290	290	290
	Øb	111	111	111	128	128	128
	Øy [max]	36	36	36	49	49	49
Terminal for cond. cross section (mm <sup>2</sup> ) min.-max.		6 6 6	25 25 25				
		-16	-16	-16	-50	-50	-50

**Highly heat-resistant contact carrier, frame terminals,** cable gland with integrated strain relief, seal and protection against kinking, enclosure with thread lock, two safety slides



Drawing	Amp. Poles	63		
		3	4	5
3 MB 71				
Dim. in mm	a	268	268	268
	Øb	95	95	95
	h	109	109	109
	Øy [max]	36	36	36
Terminal for cond. cross section (mm <sup>2</sup> ) min.-max.		6 6 6	-16	-16
		-16	-16	-16

**Highly heat-resistant contact carrier, frame terminals,** cable gland with integrated strain relief, seal and protection against kinking, enclosure with thread lock, two safety slides

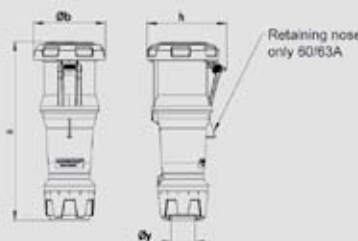

Drawing	Amp. Poles	63			125		
		3	4	5	3	4	5
3 MB 70							
Dim. in mm	a	270	270	270	310	310	310
	Øb	109	109	109	121	121	121
	h	121	121	121	133	133	133
	Øy [max]	36	36	36	49	49	49
Terminal for cond. cross section (mm <sup>2</sup> ) min.-max.		6 6 6	25 25 25				
		-16	-16	-16	-50	-50	-50