








MENNEKES CEE plugs and connectors PowerTOP plus for use under harsh conditions


with highly heat-resistant contact carrier and nickel-plated contacts

to DIN VDE 0623, EN 60309-2, colour: grey and/or colour code. Enclosure and insert made of **AMAPLAST**. Other voltages and frequencies available on request.

	3  2p+E	4  3p+E	5  3p+N+E	Ampere	Poles	110V	230V	400V	500V									
						50 a. 60Hz	50 a. 60Hz	50 a. 60Hz	50 a. 60Hz									
						3p 4h	4p 4h	5p 4h	3p 6h	4p 9h	5p 9h	3p 9h	4p 6h	5p 6h	3p 7h	4p 7h	5p 7h	
 <p>Plug PowerTOP plus</p> <p>⚠ IP 44 Product group 2219, type 3258 shown</p>				63	3	3210												
				63	4		3212											
				63	5			3249		3252								3255
 <p>Plug PowerTOP plus</p> <p>⚠ IP 67 Product group 2220, type 3325 shown</p>				63	3	3301												
				63	4	3304			3303				3308					3323
				63	5								3325					
				125	3				3358									
				125	4								3374*					3377*
 <p>Connector PowerTOP plus with SoftCONTACT</p> <p>⚠ IP 44 Product group 3219, type 3285 shown</p>				63	3	3270												
				63	4				3272				3275					3277
				63	5					3273			3285					
 <p>Connector PowerTOP plus 63A: with SoftCONTACT 125A: with TorsionSpringCONTACT</p> <p>⚠ IP 67 Product group 3220, type 3425 shown</p>				63	3	3401												
				63	4	3404			3403				3408					3423
				63	5								3425					
				125	3				3457*									
				125	4								3469*					3472*
			125	5								3480*						


*Until the PowerTOP plus are available for 125A, the reliable PowerTOP plugs and connectors are delivered with external strain relief.

Highly heat-resistant contact carrier, frame terminals, nickel-plated contacts, cable gland with integrated strain relief, seal and protection against kinking, enclosure with thread lock, two safety slides




Drawing	Amp. Poles	63		
		3	4	5
2 MB 228				
Dim. in mm	a	250	250	250
	Øb	90	90	90
	Øy [max]	36	36	36
Terminal for cond. cross section (mm ²) min.-max.		6 6	6 6	6 6
		-16	-16	-16

Highly heat-resistant contact carrier, frame terminals, nickel-plated contacts, cable gland with integrated strain relief, seal and protection against kinking, enclosure with thread lock, two safety slides

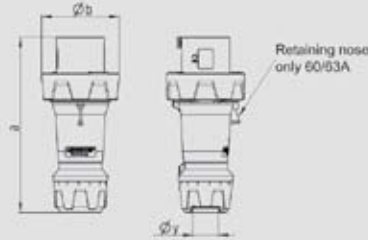


Drawing	Amp. Poles	63			125		
		3	4	5	3	4	5
2 MB 227							
Dim. in mm	a	250	250	250	290	290	290
	Øb	111	111	111	128	128	128
	Øy [max]	36	36	36	49	49	49
Terminal for cond. cross section (mm ²) min.-max.		6 6 6	25 25 25				
		-16	-16	-16	-50	-50	-50

Highly heat-resistant contact carrier, frame terminals, cable gland with integrated strain relief, seal and protection against kinking, enclosure with thread lock, two safety slides



Drawing	Amp. Poles	63		
		3	4	5
3 MB 71				
Dim. in mm	a	268	268	268
	Øb	95	95	95
	h	109	109	109
	Øy [max]	36	36	36
Terminal for cond. cross section (mm ²) min.-max.		6 6 6		
		-16	-16	-16

Highly heat-resistant contact carrier, frame terminals, cable gland with integrated strain relief, seal and protection against kinking, enclosure with thread lock, two safety slides

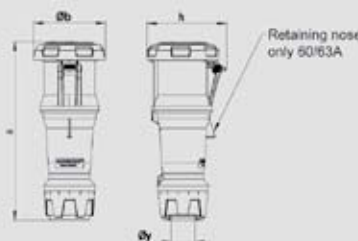

Drawing	Amp. Poles	63			125		
		3	4	5	3	4	5
3 MB 70							
Dim. in mm	a	270	270	270	310	310	310
	Øb	109	109	109	121	121	121
	h	121	121	121	133	133	133
	Øy [max]	36	36	36	49	49	49
Terminal for cond. cross section (mm ²) min.-max.		6 6 6	25 25 25				
		-16	-16	-16	-50	-50	-50