

Technical data sheet

GES2 service outlet with handle clamp

Art.-Nr. 7405120



Service outlet with handle clamp for up to 3 individual Modul 45 devices in one UT3 universal support, use in duct systems and system floors.




PA Polyamide

| | |
|--------------------------------------|--|
| Additional product text, instruction | Up to 2 installation devices with 50 mm central plate can be inserted. |
| Additional product text 1 | |

Master data

| | |
|---------------------|-------------------|
| Item no. | 7405120 |
| Type | GES2 U 9011 |
| Description 1 | Service outlet |
| Description 2 | for duct mounting |
| Dimension | 192x118x61 |
| Colour | Graphite black |
| RAL number | 9011 |
| Material | Polyamide |
| Material symbol | PA |
| Smallest sales unit | 1,00 Piece |
| Weight | 61,30 kg/100 pc. |

Technical data

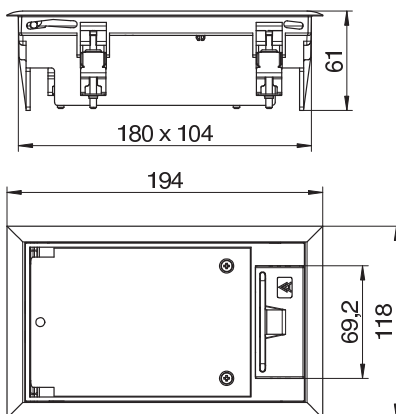

| | |
|---|-------------------------------------|
| Wide external dimensions | 118,00 mm |
| Wide installation dimensions | 104,00 mm |
| Length of external dimensions | 194,00 mm |
| Length of installation dimensions | 180,00 mm |
| Number of installable devices | 3,00 |
| Number of mounting boxes | 1,00 |
| Floor covering thickness | 5,00 mm |
| Floor covering protection frame | <input checked="" type="checkbox"/> |
| Floor care | Dry |
| Version for | Rectangular |
| Seal installation option | <input type="checkbox"/> |
| Installation depth | 72,00 mm |
| Floor height | 73 mm |
| Device support to accept mounting boxes | <input checked="" type="checkbox"/> |
| Suitable for wet care | <input type="checkbox"/> |
| Suitable for screed-flush closed underfloor ducts | <input type="checkbox"/> |
| Suitable for screed-covered underfloor ducts | <input checked="" type="checkbox"/> |
| Suitable for raised floor installation | <input type="checkbox"/> |
| Suitable for cavity floor installation | <input type="checkbox"/> |
| Suitable for underfloor ducts | <input checked="" type="checkbox"/> |


Technical data sheet

GES2 service outlet with handle clamp

Art.-Nr. 7405120



Technical data

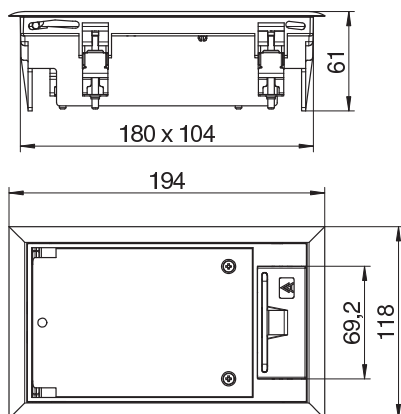

| | |
|--|-------------------------------------|
| With floor covering recess | <input checked="" type="checkbox"/> |
| Nominal size for device installation units | 2 |
| Suitable for underfloor box | 250 |
| Frame version | Carpet protection frame |
| Schwerlastausführung | <input type="checkbox"/> |
| Typ des Einbausystems | UT3 |
| Approvals | VDE |
| | VDE |