


Technical data sheet

GES4 service outlet with locking slider

Art.-Nr. 7405147

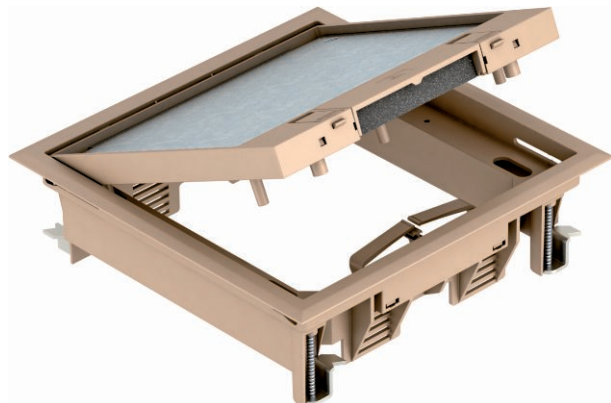

Service outlet with locking slider for up to 6 individual Modul 45 devices in 2 UT3 universal supports, use in duct systems and system floors.
Floor covering recess in the hinged cover pre-adjusted to 5 mm, if necessary adjustable to 3, 8 or 10 mm.





PA Polyamide

Additional product text, instruction	Up to 4 installation devices with 50 mm central plate can be inserted.
Additional product text 1	

Master data

Item no.	7405147
Type	GES4-2U10T 1019
Description 1	Service outlet
Description 2	for universal mounting
Dimension	222x222x65
Colour	Grey-beige
RAL number	1019
Material	Polyamide
Material symbol	PA
Smallest sales unit	1,00 Piece
Weight	124,00 kg/100 pc.

Technical data

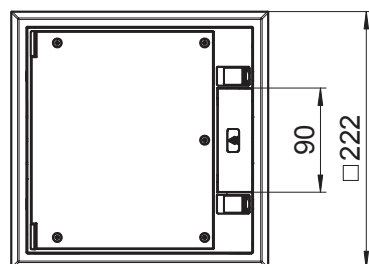

Wide installation dimensions	201,00 mm
Length of installation dimensions	201,00 mm
Number of installable devices	6,00
Number of mounting boxes	2,00
Floor covering thickness	10,00 mm
Floor covering protection frame	☒
Floor care	Dry
Version for	Square
Seal installation option	☐
Installation depth	73,00 mm
Floor height	73 mm
Device support to accept mounting boxes	☒
Suitable for wet care	☐
Suitable for screed-flush closed underfloor ducts	☐
Suitable for screed-covered underfloor ducts	☒
Suitable for raised floor installation	☒
Suitable for cavity floor installation	☒
Suitable for underfloor ducts	☒
With floor covering recess	☒
Nominal size for device installation units	4



Technical data sheet

GES4 service outlet with locking slider

Art.-Nr. 7405147



Technical data

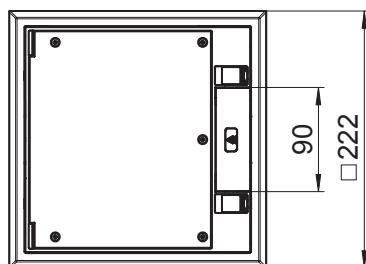

Suitable for underfloor box	250/350
Frame version	Carpet protection frame
Schwerlastausführung	☐
Typ des Einbausystems	UT3
Approvals	VDE
	VDE