


Technical data sheet

Combination arrestor, 3-pole + NPE with acoustic signalling

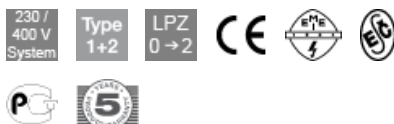

V 25-B+C/...: Combination arrestor set, lightning and surge arrestor Type 1+2 to DIN EN 61643-11 (B+C to VDE 0675 Part 6).

- Complete unit consisting of cover and base, pre-mounted and ready for connection
- Suitable for TN-S and TT network systems
- With audible signalling for function monitoring, signal tone can be turned off for 24 h
- Plug-in arrestor with dynamic isolating device
- With visual function display
- Protection level • Encapsulated non-extinguishing zinc oxide varistor arrestor for use in standard distributor housings
- Labelled connections

Application example: Building with open-wire power supply or for setting up lightning protection equipotential bonding in residential buildings.

Type	Maximum continuous voltage V	Version	Pack Units	Weight kg/100 pc.	Art.-No.
V25-B+C 3NPEAS38	385	3 + NPE	1	60.300	5097111

/pc.